

Connector, form A, analogue with EN 175301-803 (ISO 4400)

Housing


Type	one-piece
Color	opaque (milky)
Material	PA6 GF20
Imprint	circuit diagram; black; top side

Cable gland

Thread	M16 x 1,5 mm
Cable diameter	6-8 mm
Color	black
Material	PA6 GF30
Tightening torque	1,8 ± 0,2 Nm

Terminal block


Material	PA6 GF30
Poles	2 + PE
Direction of protecting earth	12 h
Contact distance	18 mm

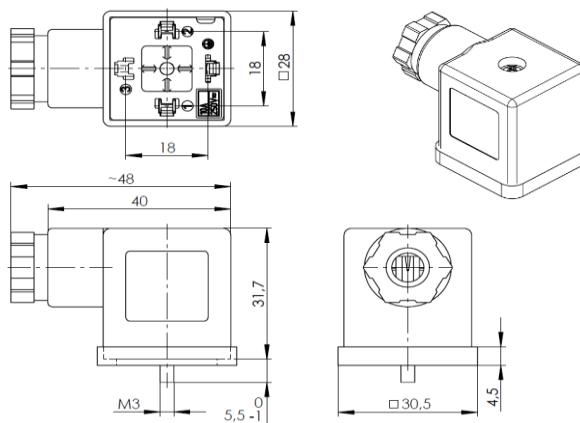

⑤ Contacts **

Material	CuZn, tin-plated
Resistance	< 15 mOhm
Conductor cross-section	0,5 - 1,5 mm²
Tightening torque	max. 0,3 Nm

Logo



Gasket

Material	NBR, black
Type	profile


Fastening screw

⑤ Material	steel 4.8, coated with zinc-nickel
⑤ Size	M3 x 34,0 mm (with cross recess)
Tightening torque	0,4 ± 0,1 Nm
Sealing washer	n/a

Circuit

Circuit	LED + varistor
Color of LED	yellow
Protecting element	yes, varistor
Voltage	24 V ± 15 %
Current type	AC / DC
Operating current	max. 1,5 A
Protecting against wrong polarity	yes

Circuit diagram



General properties

Ambient temperature range	-25°C ... +90°C
RoHS	yes
CSA approval	n/a
Protection grade (IEC 60529) *	IP65

Packaging

100 pcs packaging. Terminal block and housing are packed in pre-assembled condition. Cable gland componets are pre-assembled in housing. Fastening screw is inserted in the packet in packaged condition. Profile gasket is inserted into the packet in packaged condition.

* Must be tested in properly mounted state on the counterpart.

** In order to establish a suitable electrical connection, the use of ferrules for stranded respectively fine-stranded conductors is mandatory. Be aware that the conductor cross-section affects the maximum current-load capacity.

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances DIN ISO 2768-v	Format/Size: A4		Maßstab/Scale:		Gewicht/Weight:		
					Schutzvermerk beachten Observe protection note ISO 16016	Werkstoff: Material:					
5	31645	07.10.2022	BKI			Connector field att. A 03By	Benennung: Title:				
4	31588	18.08.2022	BKI								
3	29839	13.02.2020	AKO								
2	29360	18.06.2019	GJO								
1	27389	23.08.2016	LMA								
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By								
Geprüft: Checked:		07.10.2022 JONAS			Ident. - Nr.:		Freigabe-Nr.: Approval no.:		Blatt: Sheet:		
Erstellt: Created:		08.11.2010 SZABO			611-201-0848		23192		1		
					Ersatz für/Replacement for:						