

Molded connector, form A, analogue with EN 175301-803 (ISO 4400)

Molded sheathing

Color	anthracite (translucent)
Material	TPU
Imprint	circuit diagram; white; on front side

Terminal block

Material	PA6 GF15
Poles	2 + 2 PE
Direction of protecting earth	6/12 h
Contact distance	18 mm

Cable

Jacket	PVC, black
Internal cores	yellow/green, blue, brown
Cores x cross-section	3 x 0,75 mm ²
Outer diameter	ca. 6,7 mm
Length (L)	5,00 m
Stripping (A)	30,0 mm
Core ends	equipped with wire end sleeves
Temperature range (fix)	-30 ... +80°C
Temperature range (flexible)	-5 ... +70°C

Contacts

Material	CuZn, coated with Cu/Sn
Forward resistances	< 15 mOhm

Gasket

Type	TPU, molded
------	-------------

Fastening screw

Material	A2-50 (stainless steel)
Size	M3 x 26,0 mm
Recess type	cross recess (type H) with longitudinal slot
Tightening torque	0,4 ± 0,1 Nm

Circuit

Built-in electronics	LED + flyback diode
LED	red
Protecting element	yes, diode
Voltage range	24 V ± 15 %
Current type	DC
Operating current	max. 1,50 A (Derating is to be considered.)
Protection against wrong polarity	n/a

General properties


Temperature range *	-25 ... +90°C
RoHS	yes
Protection grade (IEC 60529) **	IP67

Packaging



30 pcs packaging.
1x30 pcs. fastening screw in plastic bags.
Size of the cardboard box: 380x260x260 mm.
packaging weight: ca. 11,1 kg

* Depends on the connected cable.

** Must be tested in properly mounted state on the counterpart.

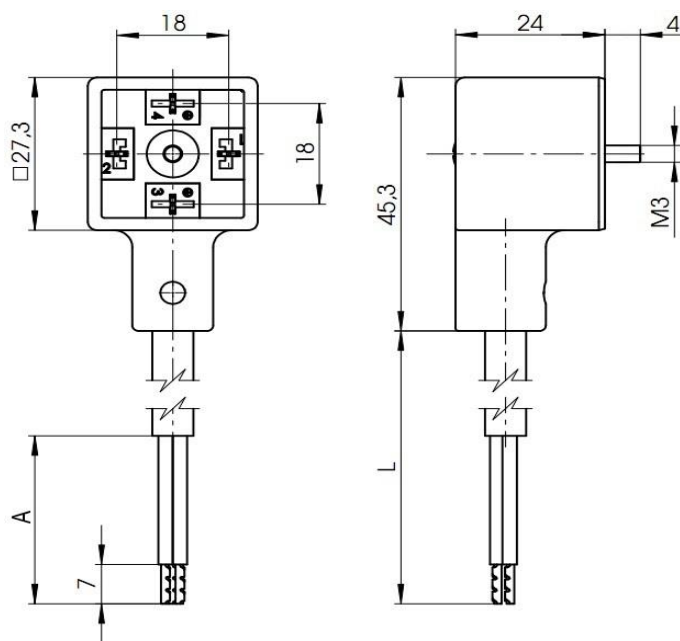

Imprint

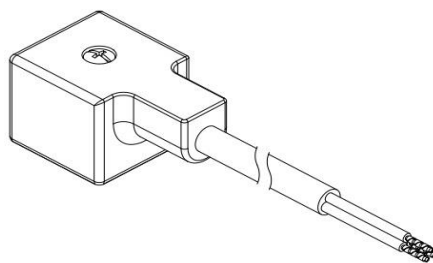

8	31323	21.03.2022	TTO	Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances DIN ISO 2768-v	Format/Size: A4		Maßstab/Scale:		Gewicht/Weight: 370 g/pcs		
7	30748	12.01.2022	BAL		Schutzvermerk ISO 16016 beachten Observe protection note ISO 16016	Werkstoff: Material:		Benennung: Title: Molded con A2+2E12 PVC3x0,75 5,00m 02Br			
6	28645	24.07.2018	GJO								
5	28333	01.03.2018	GJO								
4	28109	16.10.2017	GJO								
3	26609	08.02.2016	PKR	Ind Rev Änderung-Nr. Change no.	Datum Date	Name By	Ident. - Nr.: 611-202-0340 Freigabe-Nr.: Approval no.: 25260 Blatt: Sheet: 1/1				
2	26600	01.02.2016	PKR								
Geprüft: Checked:		21.03.2022 JONAS			Ersatz für/Replacement for:						
Erstellt: Created:		31.03.2014 KROZSER									

Technical changes reserved.