

Connector, form B, industrial type

Housing


Type	one-piece
Color	black
Material	PA6 GF30
Imprint	n/a

Cable gland

Thread	M16 x 1,5 mm
Cable diameter	4-6 mm
Color	black
Material	PA6 GF30
Tightening torque	1,8 ± 0,2 Nm

Terminal block


Material	PA6 GF30
Poles	2 + PE
Direction of protecting earth	lockable in 180 degree increments in housing
Contact distance	11 mm

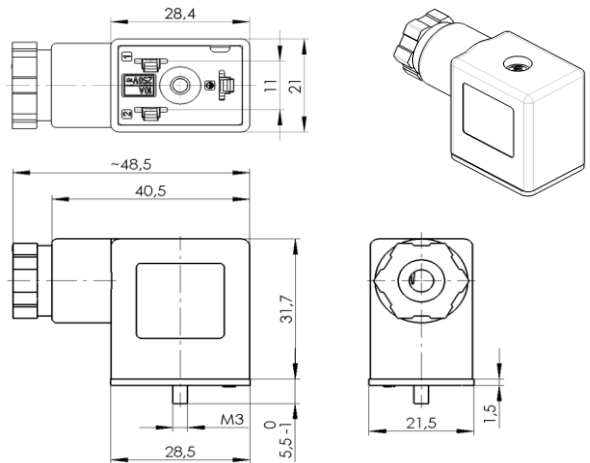

② Contacts **

Material	CuZn, tin-plated
Resistance	< 15 mOhm
Conductor cross-section	0,5 - 1,5 mm²
Tightening torque	max. 0,3 Nm

Logo




Gasket

Material	NBR, black
Type	flat

Fastening screw

② Material	steel 4.8, coated with zinc-nickel
② Size	M3 x 34,0 mm (with cross recess)
Tightening torque	0,4 ± 0,1 Nm
Sealing washer	n/a

Circuit diagram



Circuit

Circuit	n/a
Color of LED	n/a
Protecting element	n/a
Voltage	0 - 250 V +15%
Current type	AC / DC
Operating current	max. 10 A
Protecting against wrong polarity	yes

General properties

Ambient temperature range	-25°C ... +90°C
RoHS	yes
CSA approval	n/a
Protection grade (IEC 60529) *	IP65

Packaging

Single packaging. Terminal block and housing are packed as bulk material. Cable gland components are packed loose. Fastening screw is inserted into the plastic bag. Flat gasket is inserted into the plastic bag. The transparent packaging bag is not printed.

* Must be tested in properly mounted state on the counterpart.

** In order to establish a suitable electrical connection, the use of ferrules for stranded respectively fine-stranded conductors is mandatory. Be aware that the conductor cross-section affects the maximum current-load capacity.

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances DIN ISO 2768-v	Format/Size: A4		Maßstab/Scale:		Gewicht/Weight:									
					Schutzvermerk beachten Observe protection note ISO 16016	Connector field att. I oS												
2	31633	29.09.2022	BKI	Benennung: Title:														
1	31379	11.04.2022	GJO															
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.: 612-201-0008						Freigabe-Nr.: Approval no.:		29419		Blatt: Sheet:		1	
Geprüft: Checked:											29.09.2022 JONAS							
Erstellt: Created:											04.07.2019 JONAS							
											Ersatz für/Replacement for:							