

Connector, form B, industrial type

Housing


Type	one-piece
Color	opaque (milky)
Material	PA6 GF20
Imprint	circuit diagram; black; top side

Cable gland

Thread	M16 x 1,5 mm
Cable diameter	6-8 mm
Color	black
Material	PA6 GF30
Tightening torque	1,8 ± 0,2 Nm

Terminal block


Material	PA6 GF30
Poles	2 + PE
Direction of protecting earth	12 h
Contact distance	11 mm

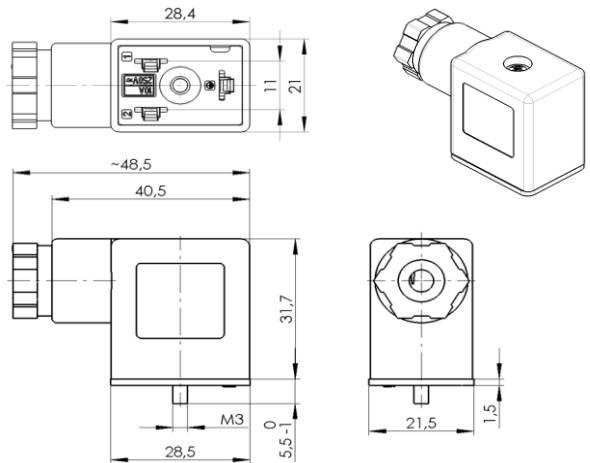

⑤ Contacts **

Material	CuZn, tin-plated
Resistance	< 15 mOhm
Conductor cross-section	0,5 - 1,5 mm²
Tightening torque	max. 0,3 Nm

Logo



Gasket

Material	NBR, black
Type	flat


Fastening screw

⑤ Material	steel 4.8, coated with zinc-nickel
⑤ Size	M3 x 34,0 mm (with cross recess)
Tightening torque	0,4 ± 0,1 Nm
Sealing washer	n/a

Circuit

Circuit	LED + varistor
Color of LED	red
Protecting element	yes, varistor
Voltage	24 V ± 15 %
Current type	AC / DC
Operating current	max. 1,5 A
Protecting against wrong polarity	yes

Circuit diagram



General properties

Ambient temperature range	-25°C ... +90°C
RoHS	yes
CSA approval	n/a
Protection grade (IEC 60529) *	IP65

Packaging

Single packaging. Terminal block and housing are packed in pre-assembled condition. Cable gland components are packed loose. Fastening screw is inserted into the plastic bag. Flat gasket is inserted into the plastic bag. The transparent packaging bag is not printed.

* Must be tested in properly mounted state on the counterpart.

** In order to establish a suitable electrical connection, the use of ferrules for stranded respectively fine-stranded conductors is mandatory. Be aware that the conductor cross-section affects the maximum current-load capacity.

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances				Format/Size: A4		Maßstab/Scale:		Gewicht/Weight:							
				DIN ISO 2768-v				Werkstoff: Material:											
5				31633				29.09.2022				BKI							
4				31531				13.07.2022				BKI							
3				29839				14.02.2020				AKO							
2				29397				26.06.2019				GJO							
1				27722				02.05.2017				LMA							
Ind Rev				Änderung-Nr. Change no.				Datum Date				Name By							
Geprüft: Checked:				29.09.2022 JONAS								Ident. - Nr.:				Freigabe-Nr.: Approval no.:		Blatt: Sheet:	
Erstellt: Created:				05.05.2011 KROZSER								612-201-0110				23444		1	
												Ersatz für/Replacement for:							