

Molded connector, form B, industrial type

Overmolding

Color	anthracit
Material	TPU
Imprint	circuit diagram white; front side

Terminal block

Material	PA6 GF15
Poles	2+Ground
Ground position	12h
Contact distance	11 mm

Cable

Jacket	PUR, Grey
Internal conductor, PVC	yellow/green, black, black
Cores	3
Conductor cross-section	0,75 mm ²
Cable length (L)	5,00 m
Stripping (A)	30,0 mm
Loose end	wire end sleeves
Rolled diameter	0,2 mm

Contacts

Material	CuZn, tinned
Forward resistances	< 15mOhm

Gasket


Form	integrated
------	------------

Central fixing screw


Material	A2-50 (stainless steel)
Size	M3 x 26,0 mm (phillips)
Tightening torque	0.4±0.1 Nm

Circuit

Circuit	LED + varistor
LED	red
Protecting element	yes, varistor
Voltage	12 V - 24 V
Current type	AC/DC
Current	max.1,5 A
Protecting against wrong polarity	yes

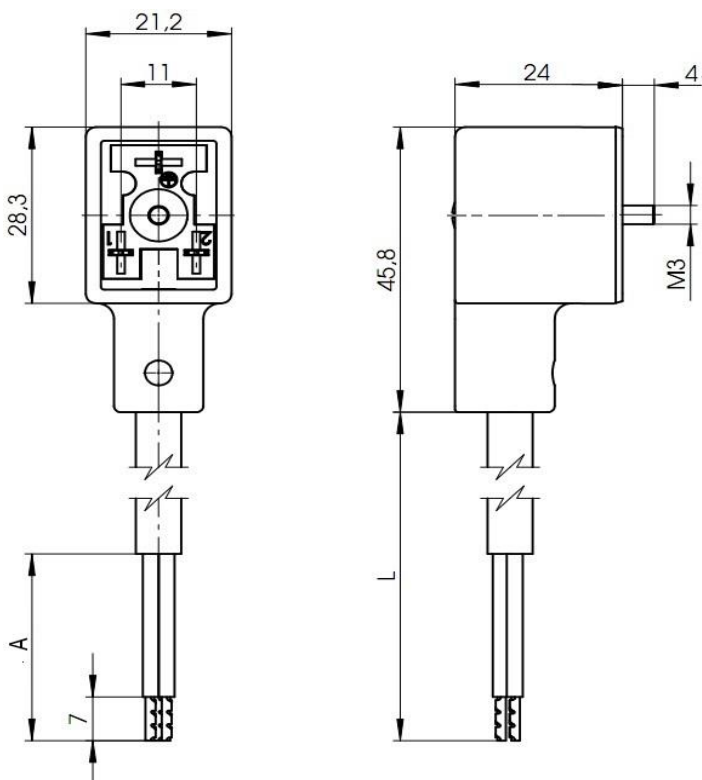

Circuit diagram




General properties

Ambient temperature	-25°C - +90 °C
RoHS	yes

Packaging

50 pcs. packaging. Minimum order quantity 2 carton.
Zentralschraube ist in 50er Beutel beige packt. Kein extra
Dichtung ist notwendig, Dichtung ist integriert.

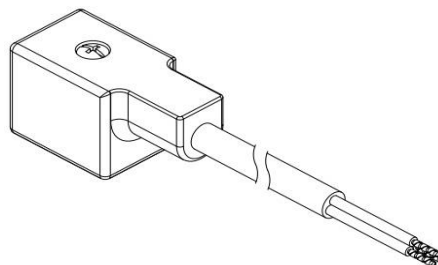

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances	Format/Size: A4	Maßstab/Scale: 1:1	Gewicht/Weight:
				DIN ISO 2768-v	Werkstoff: Material:	Kabelst. I2+E12h PUR3x0,75 5,00m 03Fr	
				Schutzvermerk beachten Observe protection note ISO 16016	Benennung: Title:		
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.:	Freigabe-Nr.: Approval no.:	Blatt: Sheet:
Geprüft: Checked:	2015.11.12 PKR				612-202-0242	26443	1/1
Erstellt: Created:	2015.11.12 konfigurator				Ersatz für/Replacement for:		