

M8 round connector acc. to IEC 61076-2-104:2008

General specifications

Form	M8
Connection	male
Connection type	straight
Number of pins	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Contact materials	CuSn / Au
Contact surface	Au
Body	TPU, black
Sleeve connector	Diecast zinc

Cable

Sheath material	PVC
Sheath color	grey
Sheath diameter	Ø 4,8 mm
Lenght	5 m ± 50mm
Core isolation	PVC
Number of cores	3-core
Conductor construction	19 x Ø 0,15mm
Cross-section	3x0,34 mm²

Elektrical specifications

Operating voltage	max. 60V DC
Operating current	max. 4A

General properties


Ambient temperature	-5 ... +70°C
IP protection degree acc. to EN 60529:2000	IP67/IP68/IP69K

Packaging


Single package

Color of cores	1-brown
	3-blue
	4-black

Projected view

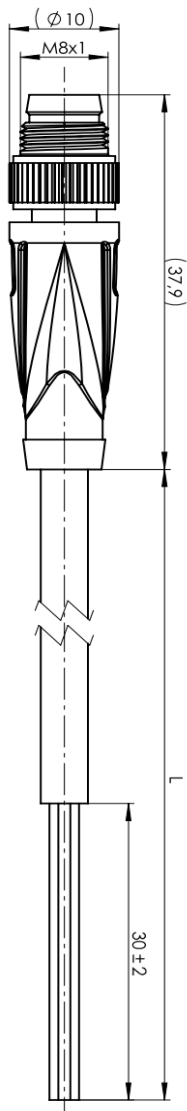

Positions of contacts



				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances DIN ISO 2768-v	Format/Size: A4	Maßstab/Scale:	Gewicht/Weight:
					Werkstoff: Material:	Round connector M8 male straight 5/3 PVC 5,00m	
				Schutzvermerk beachten Observe protection note ISO 16016	Round connector M8 male straight 5/3 PVC 5,00m		
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.:	Freigabe-Nr.: Approval no.:	Blatt: Sheet:
Geprüft: Checked:					617-202-0113	26886	1/1
Erstellt: Created:					Ersatz für/Replacement for:		
01.08.2016 PAL							
01.08.2016 MANGRA							