


M8 round connector acc. to IEC 61076-2-104:2008

Projected view

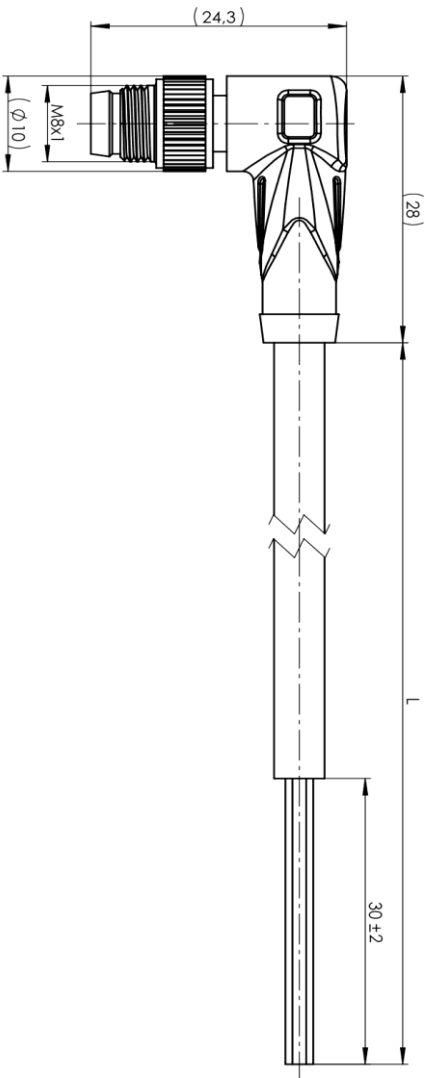

General specifications

Form	M8
Connection	male
Connection type	angled
Number of pins	4

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Contact materials	CuSn / Au
Contact surface	Au
Body	TPU, black
Sleeve connector	Diecast zinc

Cable

Sheath material	PUR
Sheath color	grey
Sheath diameter	Ø 4,3 mm
Lenght	3 m ± 50mm
Core isolation	polypropylene
Number of cores	4-core
Conductor construction	14 x Ø 0,15mm
Cross-section	4x0,25 mm²

Elektrical specifications

Operating voltage	max. 30V AC/DC
Operating current	max. 2A

General properties

Ambient temperature	-20 ... +80°C
IP protection degree acc. to EN 60529:2000	IP67/IP68/IP69K


Packaging

Single package

Color of cores

- 1-brown
- 2-white
- 3-blue
- 4-black

Positions of contacts



					Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances	Format/Size: A4	Maßstab/Scale:	Gewicht/Weight:				
					DIN ISO 2768-v	Werkstoff: Material:						
					Schutzvermerk beachten Observe protection note ISO 16016	Benennung: Title:						
						Round connector M8 male angled 5/4 PUR 3,00m						
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By			Ident. - Nr.:	617-202-0112	Freigabe-Nr.: Approval no.:	26886	Blatt: Sheet:	1/1	
Geprüft: Checked:		01.08.2016 PAL				Ersatz für/Replacement for:						
Erstellt: Created:		01.08.2016 MANGRA										