

Connector, form A, analogue with EN 175301-803 (ISO 4400)

Housing


Type	one-piece
Color	opaque (milky)
Material	PA6 GF20
Imprint	circuit diagram; black; top side

Cable gland

Thread	M20 x 1,5 mm
Cable diameter	6-8, 8-10 mm
Color	black
Material	PA6 GF30
Tightening torque	1,8 ± 0,2 Nm

Terminal block


Material	PA6 GF30
Poles	2 + PE
Direction of protecting earth	12 h
Contact distance	18 mm

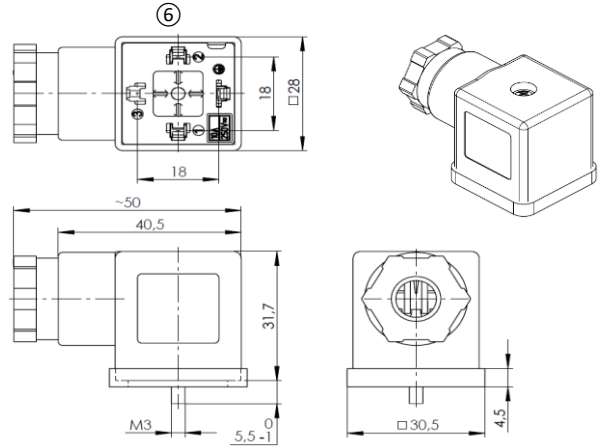

⑥ Contacts **

Material	CuZn, tin-plated
Resistance	< 15 mOhm
Conductor cross-section	0,5 - 1,5 mm ²
Tightening torque	max. 0,3 Nm

Logo



Gasket

Material	NBR, black
Type	profile


Fastening screw

Material	steel 4.8, coated with zinc-nickel
Size	M3 x 34,0 mm (with cross recess)
Tightening torque	0,4 ± 0,1 Nm
Sealing washer	n/a

Circuit

Circuit	LED + varistor
Color of LED	red
Protecting element	yes, varistor
Voltage	24 V ± 15 %
Current type	AC / DC
Operating current	max. 1,5 A
Protecting against wrong polarity	yes

Circuit diagram



General properties

Ambient temperature range	-25°C ... +90°C
RoHS	yes
CSA approval	n/a
Protection grade (IEC 60529) *	IP65

Packaging

Single packaging. Terminal block and housing are packed in pre-assembled condition. Cable gland components are packed loose. Fastening screw is inserted into the plastic bag. Profile gasket is inserted into the plastic bag. The transparent packaging bag is printed with customer specific informations.

* Must be tested in properly mounted state on the counterpart.

** In order to establish a suitable electrical connection, the use of ferrules for stranded respectively fine-stranded conductors is mandatory. Be aware that the conductor cross-section affects the maximum current-load capacity.

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances	Format/Size: A4	Maßstab/Scale:	Gewicht/Weight:
6	31686	01.12.2022	BKI	DIN ISO 2768-v	Werkstoff: Material:	Benennung: Title:	
5	31633	29.09.2022	BKI				
4	29839	14.02.2020	AKO				
3	29329	30.05.2019	GJO	Schutzvermerk beachten Observe protection note ISO 16016		Connector field att. A 03Br	
2	28878	06.11.2018	AKO				
1	25630	15.09.2014	PKR				
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.:	Freigabe-Nr.: Approval no.:	Blatt: Sheet:
Geprüft: Checked:	01.12.2022 JONAS				611-201-1035	24190	1
Erstellt: Created:	07.09.2012 MANGRA				Ersatz für/Replacement for:		