

Molded connector, form B, industrial type

Overmolding

Color	anthracit
Material	TPU
Imprint	circuit diagram white; front side

Terminal block

Material	PA6 GF15
Poles	2+Ground
Ground position	12h
Contact distance	11 mm

Cable

Jacket	PUR, Grey
Internal conductor, PVC	yellow/green, black, black
Cores	3
Conductor cross-section	0,75 mm ²
Cable length (L)	2,00 m
Stripping (A)	30,0 mm
Loose end	wire end sleeves
Rolled diameter	0,2 mm

Contacts

Material	CuZn, tinned
Forward resistances	< 15mOhm

Gasket


Form	integrated
------	------------

Central fixing screw


Material	A2-50 (stainless steel)
Size	M3 x 26,0 mm (phillips)
Tightening torque	0.4±0.1 Nm

Circuit

Circuit	LED + varistor
LED	red
Protecting element	yes, varistor
Voltage	110 V - 230 V
Current type	AC/DC
Current	max.1,5 A
Protecting against wrong polarity	yes

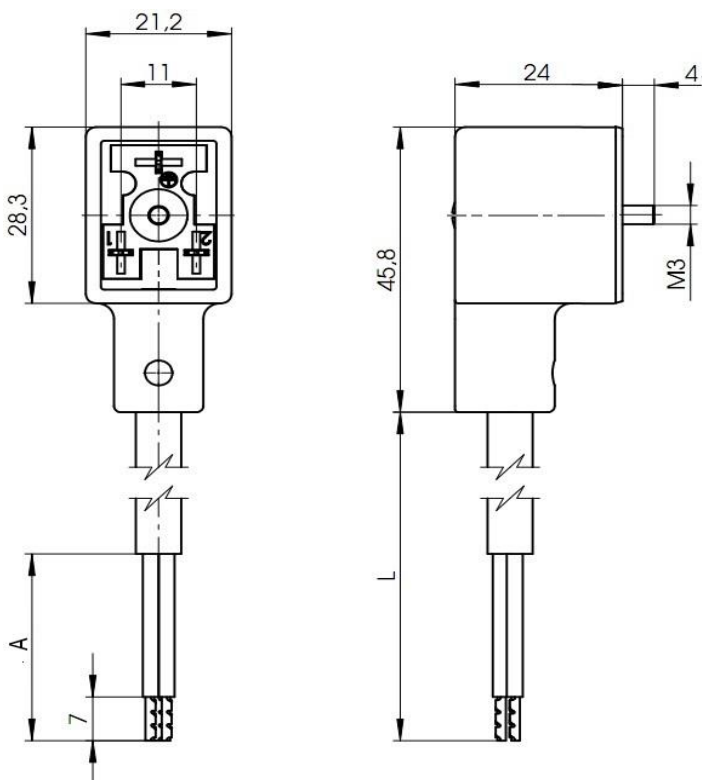

Circuit diagram




General properties

Ambient temperature	-25°C - +90 °C
RoHS	yes

Packaging

100 pcs. packaging. 100pcs Central fixing screws packed in bag. Additional gasket is not necessary, gasket is integrated.

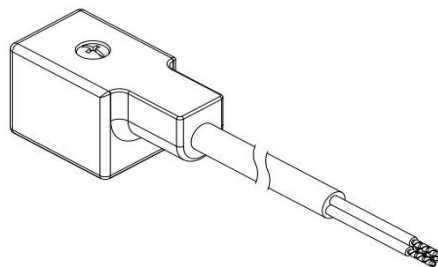

				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances	Format/Size: A4	Maßstab/Scale: 1:1	Gewicht/Weight:
				DIN ISO 2768-v	Werkstoff: Material:	Kabelst. I2+E12h PUR3x0,75 2,00m 03Jr	
				Schutzvermerk beachten Observe protection note ISO 16016	Benennung: Title:		
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.:	Freigabe-Nr.: Approval no.:	Blatt: Sheet:
Geprüft: Checked:	2015.11.12 PKR				612-202-0243	26443	1/1
Erstellt: Created:	2015.11.12 konfigurator				Ersatz für/Replacement for:		