

M8 round connector acc. to IEC 61076-2-104:2008

SAP TIM

General specifications

Form	M8
Connection	male
Connection type	straight
Number of pins	4

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Contact materials	CuSn / Au
Contact surface	Au
Body	TPU, black
Sleeve connector	Diecast zinc

Cable

Sheath material	PVC
Sheath color	grey
Sheath diameter	Ø 4,3 mm
Lenght	5 m ± 50mm
Core isolation	PVC
Number of cores	4-core
Conductor construction	14 x Ø 0,15mm
Cross-section	4x0,25 mm ²

Elektrical specifications

Operating voltage	max. 30V AC/DC
Operating current	max. 2A

General properties

Ambient temperature	-5 ... +70°C
IP protection degree acc. to EN 60529:2000	IP67/IP68/IP69K


Packaging

Single package


Color of cores

- 1-brown
- 2-white
- 3-blue
- 4-black

Projected view

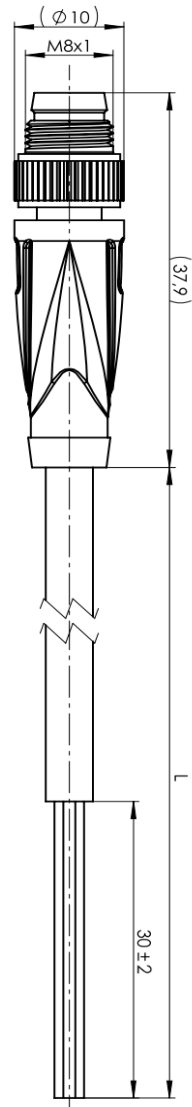

Positions of contacts



				Zulässige Abweichung für Maße ohne Toleranzangabe Unless otherwise specified tolerances	Format/Size: A4	Maßstab/Scale:	Gewicht/Weight:	
				DIN ISO 2768-v	Werkstoff: Material:			
				Schutzvermerk beachten Observe protection note ISO 16016	Benennung: Title:			
					Round connector M8 male straight 5/4 PVC 5,00m			
Ind Rev	Änderung-Nr. Change no.	Datum Date	Name By		Ident. - Nr.: 617-202-0115	Freigabe-Nr.: Approval no.:	26886	Blatt: Sheet:
Geprüft: Checked:	01.08.2016 PAL				Ersatz für/Replacement for:			1/1
Erstellt: Created:	01.08.2016 MANGRA							